

XL WALL TILES

18x48 WALL CERAMIC TILES



Crossville
Studios

 DECORTILES

XL WALL TILES

18x48 WALL CERAMIC TILES

ROYAL FENDI



45x120 cm | 18"x48" [rectified]
MT(METALLIC)

ROYAL AGAVE



45x120 cm | 18"x48" [rectified]
MT(METALLIC)

FILETTO CAMEL



45x120 cm | 18"x48" [rectified]
MA(MATTE)

FILETTO SLATE



45x120 cm | 18"x48" [rectified]
MA(MATTE)

IBIRAPUERA CINZA



45x120 cm | 18"x48" [rectified]
MA(MATTE)

IBIRAPUERA CAMEL




45x120 cm | 18"x48" [rectified]
MA(MATTE)

SAMPA FRIEZE OFF-WHITE



45x120 cm | 18"x48" [rectified]
MA(MATTE)

SAMPA FRIEZE CIMENTO

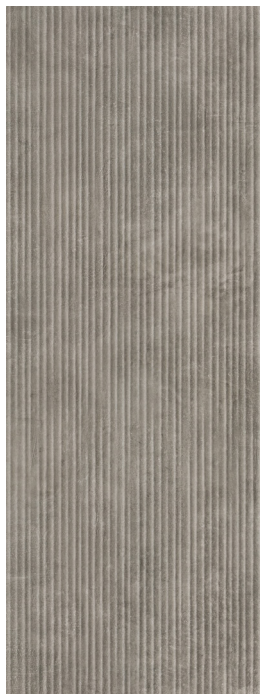

45x120 cm | 18"x48" [rectified]
MA(MATTE)




XL WALL TILES

18x48 WALL CERAMIC TILES



PRODUCT INFORMATION

	Type / Size	Series	Finish	Rectified	Unit	Work Size	Thick	Faces	Sq. Ft./ Carton	Pieces/ Carton
	Wall Tiles 18"x48"	XL WALL TILES	Matte, Metallic	Yes	SF	450 x 1200 mm 17 ¼" x 47 ¼"	13 mm	4-6*	17.44	3

*Filetto, Ibirapuera, Royal - 4 faces Sampa Frieze - 6 faces

USAGE RECOMMENDATION

	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes - Interior (Residential or Commercial)	N/A	✓
Countertops	N/A	
Facades	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1 -A326.3.

INSTALLATION AND CARE

Grout Joint Recommendation 1/16"

Shade Variation V2-V3*

*Filetto Slate - V3. All other items - V2.

Professional tile installation is recommended. For complete installation instructions consult the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation. Follow the grout manufacturer instructions for the complete removal of grout and construction residue from initial installation.

We recommend using a cloth with water and a neutral cleaner (soap less) or a general household cleaner for wall tiles cleaning.

QUALITY WARRANTY

QUALITY

Standard quality tiles manufactured by Eliane Ceramic Tiles meet or exceed ISO 13006, ANSI A137.1 standards.

FIRE PROOF

Decortiles ceramic and porcelain tiles are NOT flammable, except mesh material of mesh mounted mosaics.

VOC FREE

Decortiles ceramic and porcelain tiles are low-emitting materials with zero emission of volatile organic compounds (VOC).

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	≤ 20%
Breaking Strength	C648	≥ 125 lbs
DCOF WET	ANSI A137.1 ANSI A326.3	N/A
Scratch Hardness	MOHS	4-9
Frost Resistance	C1026	No
Chemical Resistance	C650	Class A-D
Stain Resistance	C1378	Class A















