


Crossville Studios

6 x 6 POOL TILES

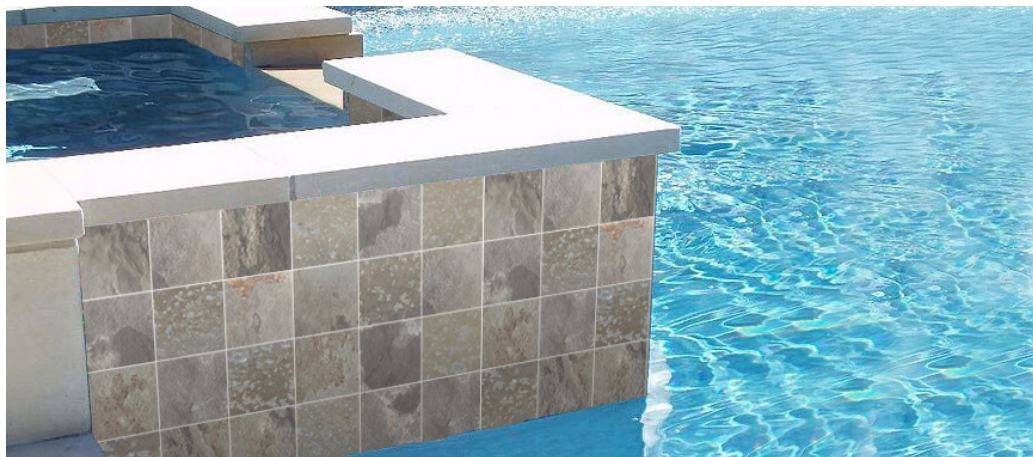

MORE SAGE

Crossville Studios' Pool offers a line of high-quality porcelain tiles in a pool-friendly 6"x 6" size. Reimagine pool tile to enhance your outdoor experience.


ALTERED STATE




WHITE HOT



STEEL GAZE



ACID WASH



MELTING POINT


PORTUGAL



VELHO WHITE



VENHO VERDE



HARVEST TAWNY

STONE FICTION



TRAVERTINE
IVORY



TRAVERTINE
SILVER

ARGENT



WINTER GARDEN



HOLLYWOOD & VINE



EMERALD CITY



WATER VAPORS



GLACIER LAKE



UNDER THE SEA



CARNEGIE COOL



MEMPHIS BLUES



CLEAN SLATE




ON THE ROCKS

More On Next Page


View other great product options and find detailed product specifications at
crossvillestudios.com

MORE

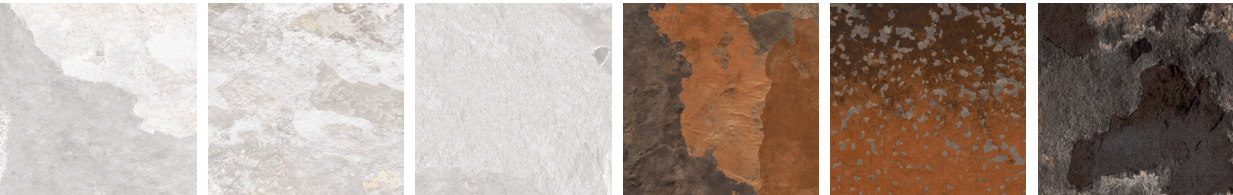

MILK

SUNSET

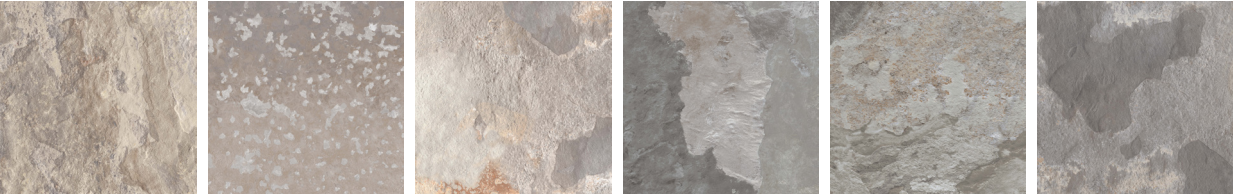


NUT

SAGE

REEF

SANDY'S
MIDNIGHT BLUE

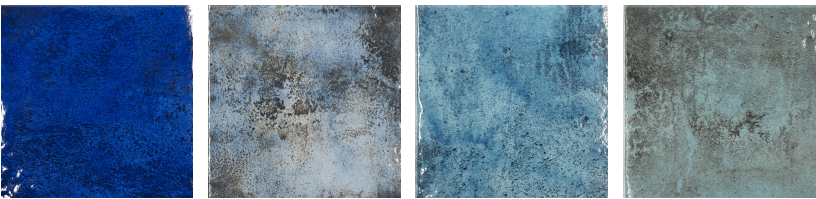

COBALTO

INDIGO


MARINO

TIFFANY



SANDY'S MIDNIGHT
BLUE

OXIDA

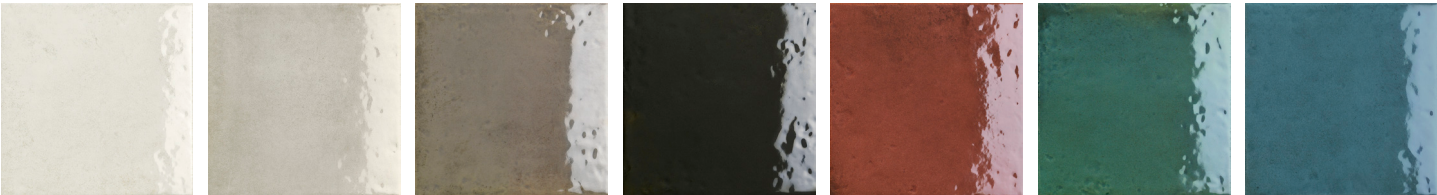

WHITE

CLAY

GREY

BLACK

RED

GREEN

BLUE

Technical Specifications								
Product Performance	Altered State	Argent	Portugal	Stone Fiction	More	Reef	Oxida	Sandy's Midnight Blue
Water Absorption	<0.50% ASTM C373	<0.50% ASTM C373	<0.50% ASTM C373	<0.50% ASTM C373	< 0.5% ISO 10545-3	< 0.5% ISO 10545-3	< 0.5% ISO 10545-3	<0.10% ASTM C373
Frost Resistance	Resistant ASTM C482	Resistant ASTM C482	Resistant ASTM C482	Resistant ASTM C482	Guaranteed ISO 10545-12	Pass ISO 10545-11	Resistant ISO 10545-12	Resistant ASTM C482
Breaking Strength	>450 lbf ASTM C648	>450 lbf ASTM C648	>450 lbf ASTM C648	>450 lbf ASTM C648	≥ 43 N/mm² ISO 10545-4	>1300 N/mm² ASM C648	Conform ISO 10545-4	>450 lbf ASTM C648
Bond Strength	>200 psi ASTM C650	>200 psi ASTM C650	>200 psi ASTM C650	>200 psi ASTM C650	–	–	–	>200 psi ASTM C650
Chemical Resistance	Unaffected ASTM C650	Unaffected ASTM C650	Unaffected ASTM C650	Unaffected ASTM C650	GA GLA GHA ISO 10545-13	GA GLA GHA ISO 10545-13	A ISO 10545-13	Unaffected ASTM C650
Stain Resistance	–	–	–	–	Compliant ISO 10545-14	Class 5 ISO 10545-14	Class 5 ISO 10545-14	–
Scratch Hardness	7 Mohs Scale	7 Mohs Scale	7 Mohs Scale	7 Mohs Scale	5 PEI ISO 10545-7	–	–	7 Mohs Scale
DCOF Unpolished	0.42 - 0.52 ANSI A326.3	0.50 - 0.602 ANSI A326.3	0.50 - 0.60 ANSI A326.3	0.50 - 0.60 ANSI A326.3	> 0.42 DCOF	–	–	0.42 - 0.52 ANSI A326.3
Shade Variation	V3	V2	V2	V3	V4	V3	V3	V3
Tile Thickness	10.5 mm	9.5 mm	9.5 mm	9.5 mm	10 mm	8 mm	10 mm	10.5 mm
Other Available Sizes	Yes (See Website)	Yes (See Website)	Yes (See Website)	Yes (See Website)	Yes (See Website)	No	Yes (See Website)	2 x 2 Mosaic
Grout Thickness	3 mm	3 mm	3 mm	3 mm	2 mm (12 x 24 3-5 mm)	2 mm	5 mm	3 mm
Application Area	Exterior walls, interior walls wet and dry and pool waterline. For detailed application information pool lining please contact your local sales representative or visit our website.							